


NO-AE Nitric Oxide Sensor – High Concentration

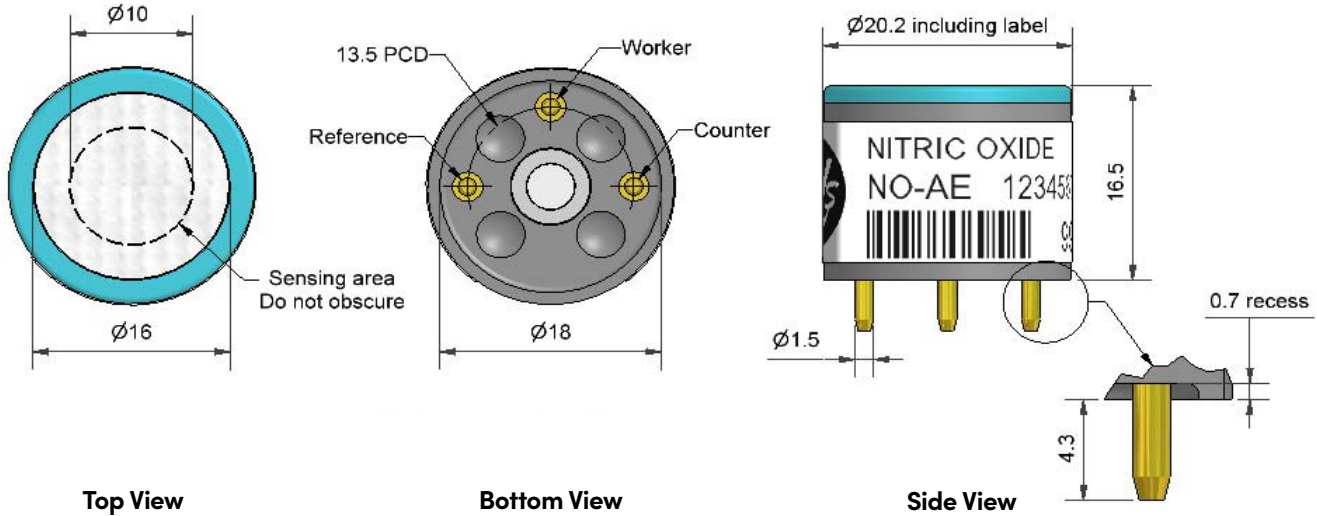

Dimensions are in millimetres (± 0.1 mm).

Performance	Sensitivity	nA/ppm in 250ppm NO	40 to 80
	Response time	t90 (s) from zero to 250ppm NO	< 75
	Zero current	ppm equivalent in zero air	0 to 15
	Resolution	RMS noise (ppm equivalent)	< 1
	Range	ppm NO limit of performance warranty	5,000
	Linearity	ppm error at full scale, linear at zero and 1000ppm NO	< 250
	Overgas limit	maximum ppm for stable response to gas pulse	10,000
	Lifetime	Zero drift	ppm equivalent change/year in lab air
Sensitivity drift		% change/year in lab air, monthly test	nd
Operating life		months until 80% original signal (24-month warranted)	> 24
Environmental	Sensitivity @ -20°C	% (output @ -20°C/output @ 20°C) @ 50ppm	65 to 90
	Sensitivity @ 50°C	% (output @ 50°C/output @ 20°C) @ 50ppm	103 to 112
	Zero @ -20°C	ppm equivalent change from 20°C	< 0 to -3
	Zero @ 50°C	ppm equivalent change from 20°C	< 10 to 40
Cross Sensitivity	H ₂ S sensitivity	% measured gas @ 20ppm	H ₂ S < 50
	NO ₂ sensitivity	% measured gas @ 50ppm	NO ₂ < 20
	Cl ₂ sensitivity	% measured gas @ 10ppm	Cl ₂ < 25
	SO ₂ sensitivity	% measured gas @ 20ppm	SO ₂ < 5
	CO sensitivity	% measured gas @ 400ppm	CO < 0.1
	H ₂ sensitivity	% measured gas @ 400ppm	H ₂ < 0.1
	C ₂ H ₄ sensitivity	% measured gas @ 400ppm	C ₂ H ₄ < 0.1
	NH ₃ sensitivity	% measured gas @ 20ppm	NH ₃ < 0.1
CO ₂ sensitivity	% measured gas @ 5% volume	CO ₂ < 0.1	
Key Specifications	Temperature range	°C	-30 to +50
	Pressure range	kPa	80 to 120
	Humidity range	% rh continuous	15 to 90
	Storage period	months @ 3 to 20°C (stored in sealed pot)	6
	Bias voltage	mV (working electrode potential is above ground)	+300
	Load resistor	Ω (recommended)	10 to 47
	Weight	g	< 6

Figure 1 Sensitivity Temperature Dependence

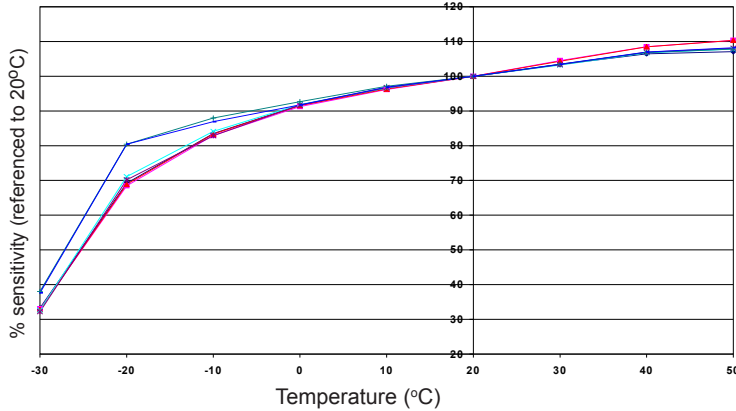


Figure 1 shows the variation in sensitivity caused by changes in temperature.

This data is taken from a typical batch of sensors.

Figure 2 Zero Temperature Dependence


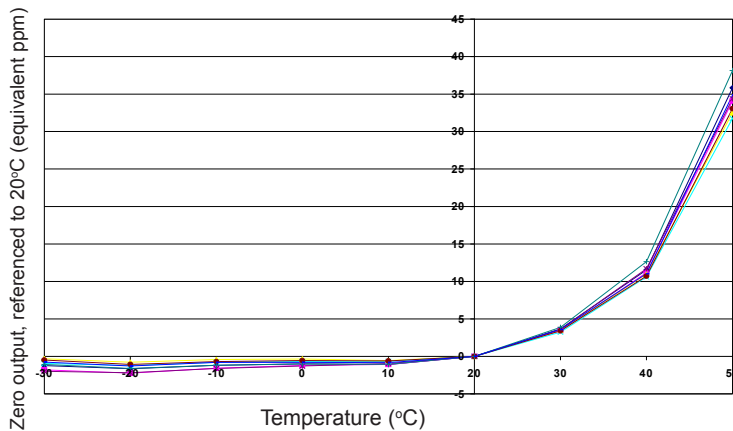


Figure 2 shows the variation in zero output caused by changes in temperature, expressed as ppm gas equivalent, referenced to zero at 20°C.

This data is taken from a typical batch of sensors.

Figure 3 Response up to 1% NO

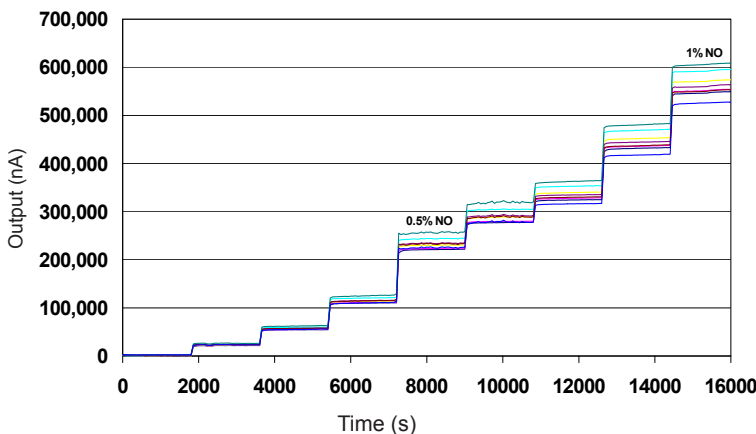

The NO-AE shows fast, stable response from 0 to 1% NO.

At the end of the product's life, do not dispose of any electronic sensor, component or instrument in the domestic waste, but contact the instrument manufacturer, Alphasense or its distributor for disposal instructions. NOTE: all sensors are tested at ambient environmental conditions unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only. Alphasense Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within. (©ALPHASENSE LTD) Doc. Ref. NO-AE/JUN22